

FLOS

F2601009 White

Gatto

Designed by Achille and Pier Giacomo Castiglioni, 1960

Halogen - 60W




Table lamp providing diffused light. White powder coated internal steel structure sprayed with a unique "cocoon" resin to create the diffuser which is then protected by a transparent sprayed on finish. On the cable there is the electronic dimmer which allows the regulation of light brightness.

Main specifications

EAN	8059607002056
Mounting	Table
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	Halogen
Lamp holders	E27
Iicos	HSGSA
Number of lamps	1
Power (W)	60

Physical

Colour	White
Length (mm)	385
Cord colour	White
Cord length (mm)	1800
Net weight (kg)	1.7
Package height (mm)	800
Package width (mm)	440
Package length (mm)	440
Package volume (m3)	0.15
IP internal	20

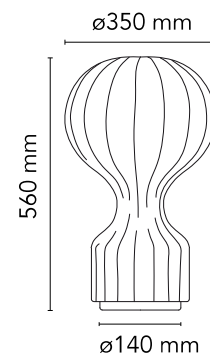

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF

Photometric Files


LDT / IES	↓ LDT
-----------	-------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Schematic light drawing



Luminous flux luminaire
710 lm

Photometric

Light distribution	Symmetric
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Dimmable	Yes
Dimming interface	Dimmer Integrated
Plug type	Type C
Batteries inside	No

FLOS

F2701009 White

Gatto Piccolo

Designed by Achille and Pier Giacomo Castiglioni, 1960



Halogen - 60W


Table lamp providing diffused light. White powder coated internal steel structure sprayed with a unique "cocoon" resin to create the diffuser which is then protected by a transparent sprayed on finish. On the cable there is the electronic dimmer which allows the regulation of light brightness.

Main specifications

EAN	8059607002087
Mounting	Table
Environments	Indoor dry location
Light source type	Bulb
Light sources included	No
Lamp category	Halogen
Lamp holders	E14
Ilcos	HSGSA
Number of lamps	1
Power (W)	60

Physical

Colour	White
Length (mm)	190
Cord colour	White
Cord length (mm)	1800
Net weight (kg)	0.8
Package height (mm)	480
Package width (mm)	280
Package length (mm)	280
Package volume (m3)	0.04
IP internal	20



Download

[Mounting instructions](#)  PDF

[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  LDT

Technical Drawings


[2D](#)  ZIP

[3D](#)  ZIP



IK
00

Schematic light drawing



Photometric

Light distribution	Symmetric
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Dimmable	Yes
Dimming interface	Dimmer Integrated
Plug type	Type C
Batteries inside	No